


Bespoke moulded components fitting recommendations

External corner

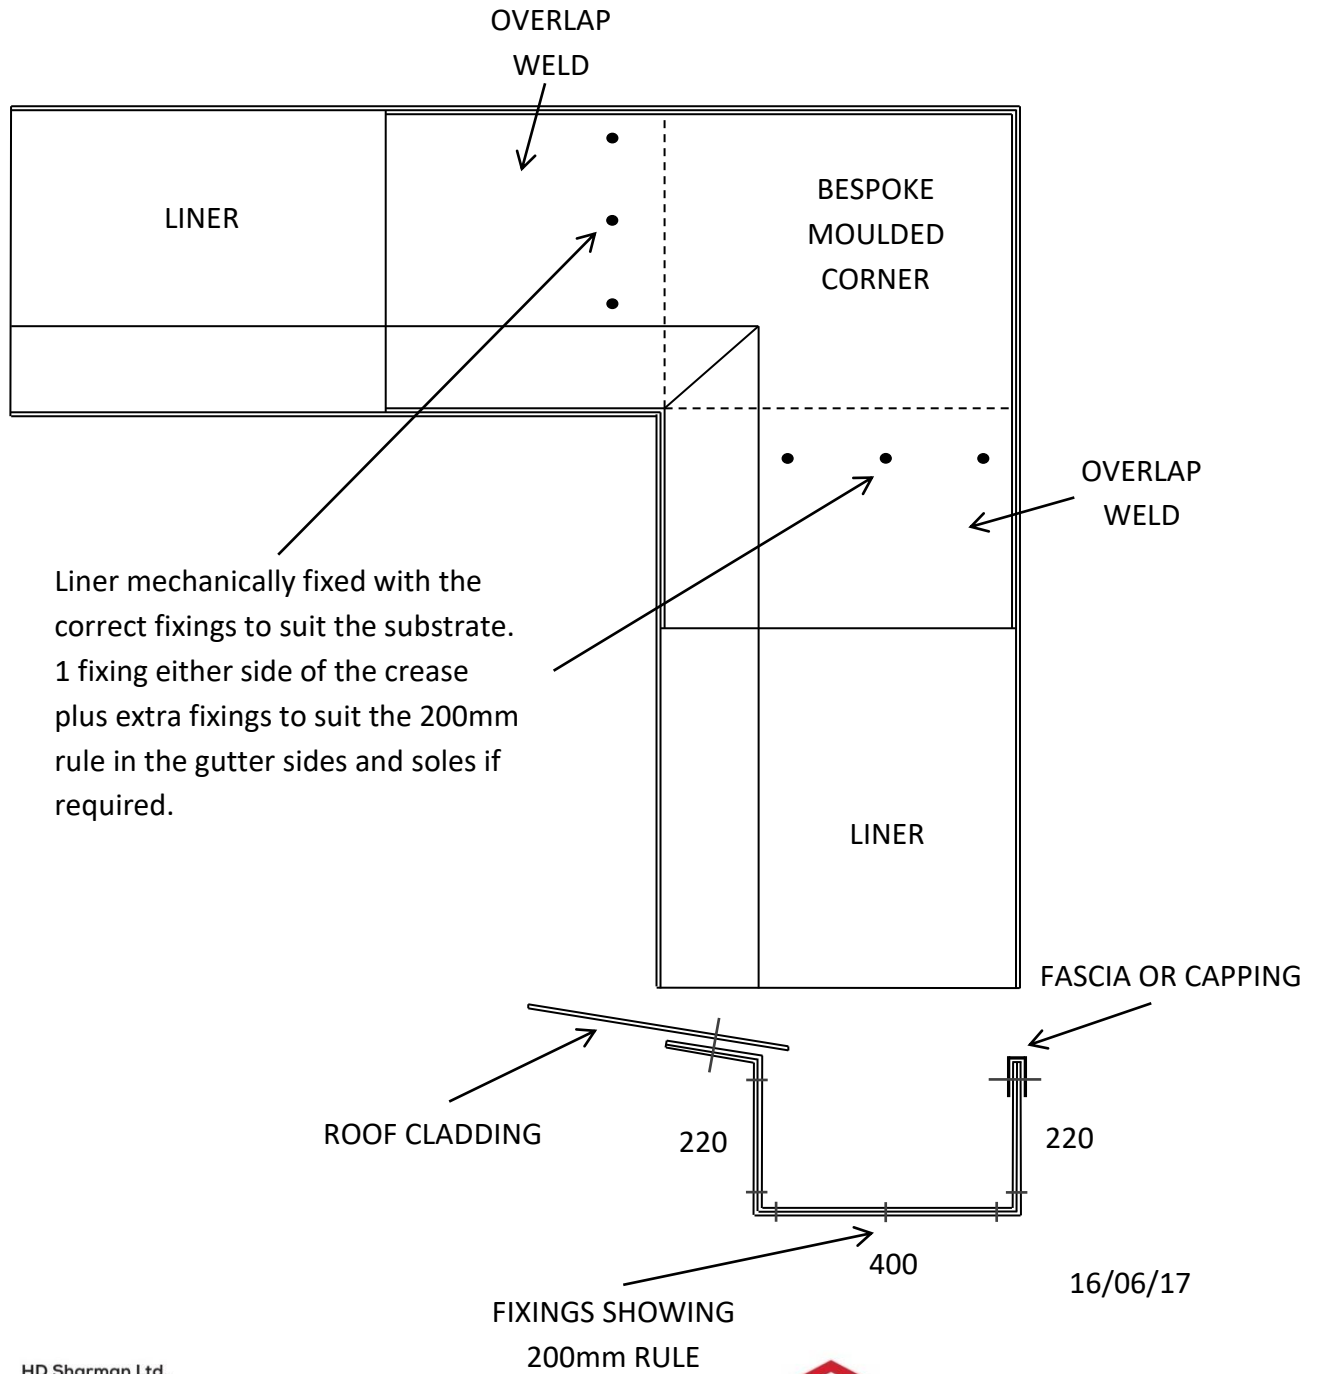

Liner mechanically fixed with the correct fixings to suit the substrate. 1 fixing either side of the crease plus extra fixings to suit the 200mm rule in the gutter sides and soles if required.